

## NAMVK

NMD 1.85mm to 2.92mm

### Features:

\* Low VSWR

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency: DC~40GHz  
 VSWR: 1.2 max.  
 Impedance: 50Ω


### Mechanical

RF Connectors: NMD 1.85mm  
 2.92mm  
 Mating Life Cycle: 500 cycles  
 Outer Conductor: Passivated stainless steel  
 Dielectric: PEI  
 Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

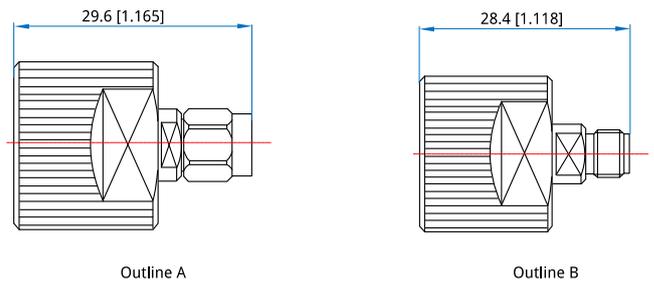

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

### How To Order

**NAMVK-FM** - NMD 1.85mm(f) to 2.92mm(m), Outline A

**NAMVK-FF** - NMD 1.85mm(f) to 2.92mm(f), Outline B

Customization is available upon request.