

NASB-B
SMA to BNC

Features:
* Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar



Electrical

Frequency:	DC-3GHz (Outline E) DC-4GHz (Outline F, G) DC-6GHz
VSWR:	1.15 max. (Outline F, G) 1.25 max. (Outline E) 1.35 max.
Impedance:	50Ω

Mechanical

RF Connectors:	SMA BNC
Outer Conductor:	Nickel plated brass
Dielectric:	PTFE
Inner Conductor:	Glod pated brass or gold plated phosphor copper

Environmental

Operating Temperature: -55~+155°C

How To Order

NASB-MM-B - SMA(m) to BNC(m), Outline A

NASB-FM-B - SMA(f) to BNC(m), Outline B

NASB-MF-B - SMA(m) to BNC(f), Outline C

NASB-FF-B - SMA(f) to BNC(f), Outline D


NASBH-FF-B - SMA(f) to BNC(f) bulk head, Outline E

NASBH-FF-B-1 - SMA(f) to BNC(f) bulk head, Outline F


NASBL-FF-B - SMA(f) to BNC(f) flange mount, Outline G

Customization is available upon request.


Outline Drawings




Outline A




Outline B




Outline C




Outline D

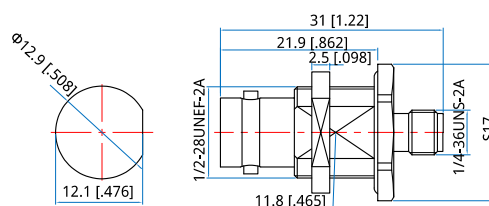

Outline E

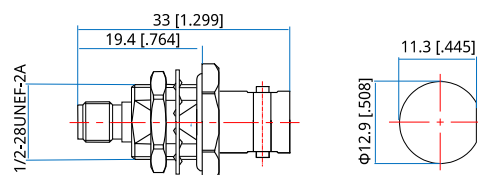

Outline F

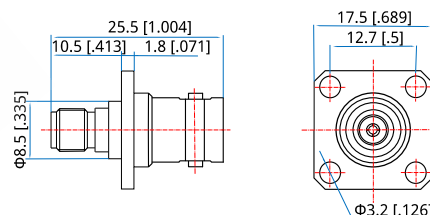

Outline G

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]