

NASD SMA to SMB

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency:	DC~4GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC 500V DC (Outline D)
Impedance:	50Ω


Mechanical

RF Connectors:	SMA SMB
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

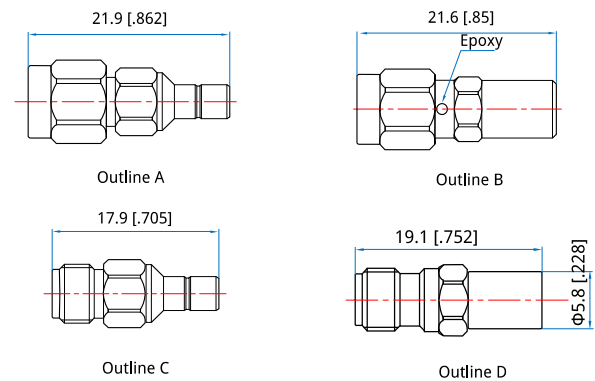

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

NASD-MM - SMA(m) to SMB(m), Outline A

NASD-MF - SMA(m) to SMB(f), Outline B

NASD-FM - SMA(f) to SMB(m), Outline C

NASD-FF - SMA(f) to SMB(f), Outline D

Customization is available upon request.