

NASI-B SMA to BMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~6GHz DC~18GHz (Outline F)
VSWR:	1.15 max. 1.2 max.(Outline E)
Impedance:	50Ω

Mechanical

RF Connectors:	SMA BMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass Ternary alloy plated brass (Outline G)
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

How To Order

NASI-MM-B - SMA(m) to BMA(m), Outline A

NASI-MF-B - SMA(m) to BMA(f), Outline B

NASI-FM-B - SMA(f) to BMA(m), Outline C

NASI-FF-B - SMA(f) to BMA(f), Outline D


NASIH-FF-B - SMA(f) to BMA(f), Bulk head, Outline E

NASIL-FM-B - SMA(f) to BMA(m), Flange mount, Outline F


NASIL-FF-B-02 - SMA(f) to BMA(f), Flange mount, two holes, Outline G

Customization is available upon request.


Outline Drawings




Outline A




Outline B




Outline C




Outline D




Outline E

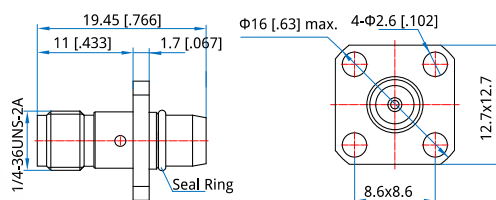

Outline F



Outline G



Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]