

NASI SMA to BMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max. 1.35 max. (Outline E, F, G)
Impedance:	50Ω

Mechanical

RF Connectors:	SMA BMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature: -55~+165°C

How To Order

NASI-MM - SMA(m) to BMA(m), Outline A

NASI-MF - SMA(m) to BMA(f), Outline B

NASI-FM - SMA(f) to BMA(m), Outline C

NASI-FF - SMA(f) to BMA(f), Outline D


NASIL-FF - SMA(f) to BMA(f), Flange mount, Outline E

NASIL-FF-1 - SMA(f) to BMA(f), Flange mount, Outline F

NASIL-FF-2 - SMA(f) to BMA(f), Flange mount, Outline G

Customization is available upon request.

Outline Drawings

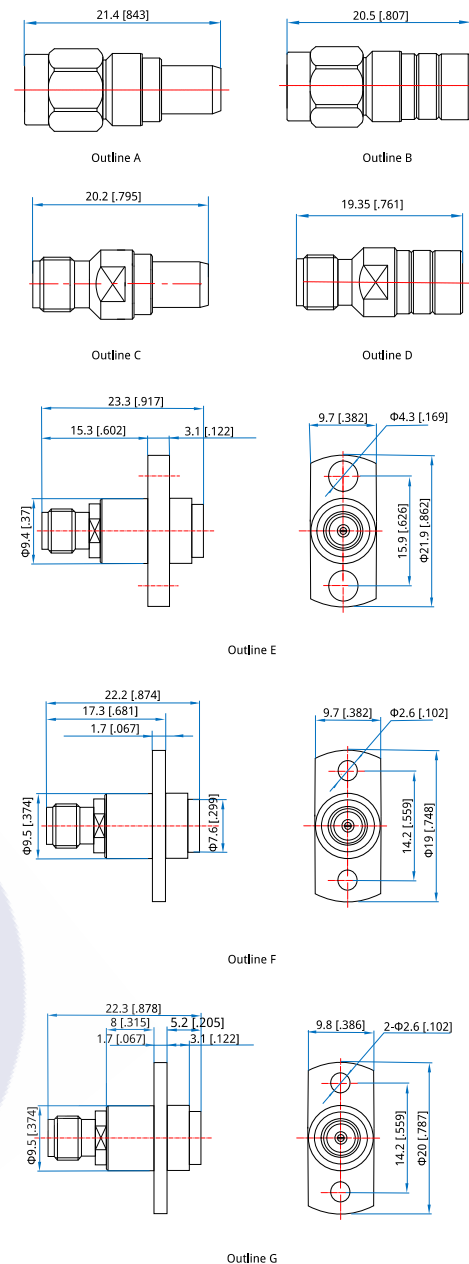

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]