

NASQS

SMA to Quick SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical

RF Connectors: SMA
Quick SMA
Outer Conductor: Gold plated brass or passivated stainless steel
Dielectric: PTFE
Inner Conductor: Gold plated beryllium copper or Gold plated brass

Outline Drawings

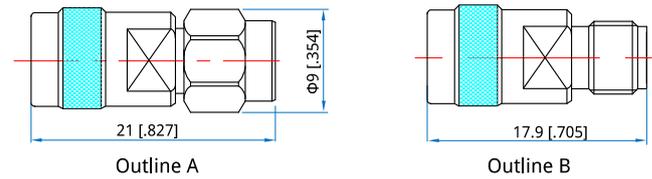

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NASQS-MM - SMA (m) to Quick SMA (m), OutlineA

NASQS-FM - SMA (f) to Quick SMA (m), Outline B

Customization is available upon request.

