

## NCC-32000-38000-10-K-1

32~38GHz, 10W

### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

### Applications:

- \* Wireless
- \* Radar
- \* Laboratory Test

### Electrical

Frequency:	32~38GHz
Insertion Loss:	1.2dB max.
Isolation:	15dB min.
VSWR:	1.5 max.
Average Power:	10W

### Mechanical


Size <sup>*1</sup> :	13*25*16.8mm 0.512*0.984*0.661in
RF Connectors:	2.92mm Female
Mounting:	3-M2.5 through-hole
Direction:	Clockwise

[1] Exclude connectors.

### Environmental

Temperature:	-30~+70°C
--------------	-----------

### Outline Drawings

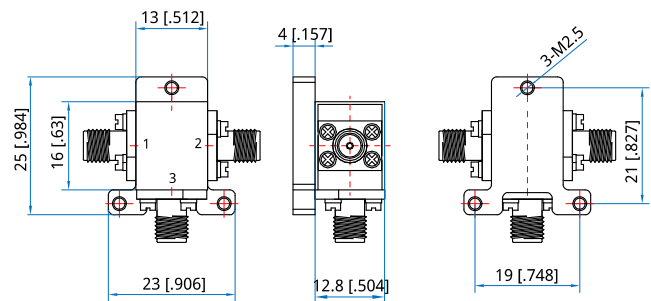

Unit: mm [in]

Tolerance: ±0.15mm [±0.006in]

### How To Order

**NCC-32000-38000-10-K-1**

Customization is available upon request.