

**NCC-4000-8000-K3-N-1**  
4~8GHz, 300W

Features:  
\* Broadband  
\* High Power  
\* Low Insertion Loss

Applications:  
\* Wireless  
\* Radar  
\* Laboratory Test

**Electrical**

Frequency:	4~8GHz
Insertion Loss:	0.6dB max.
Isolation:	15dB min.
VSWR:	1.5 max.
Average Power:	300W

**Mechanical**


Size*1:	29.7*36*30mm 1.169*1.417*1.181in
RF Connectors:	N Female
Cooling:	Forced air
Direction:	Clockwise

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

**Outline Drawings**

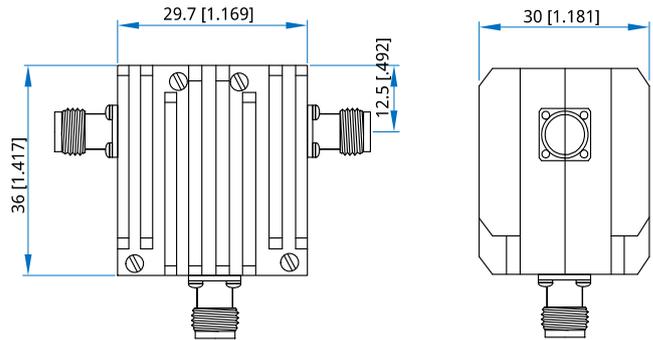

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NCC-4000-8000-K3-N-1**

Customization is available upon request.

