

NCC2025B

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

NCC2025B series Coaxial Circulators cover frequency range 1.3~4GHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power (W)	Connector	Temperature (°C)
1300~4000	100	0.30	23.0	1.20	100	SMA	-30~+70
1700~1900	200	0.40	20.0	1.25	100	SMA	-30~+70
1900~2200	300	0.40	20.0	1.25	100	SMA	-30~+70
2400~2500	100	0.25	25.0	1.15	100	SMA	-30~+70
2500~2700	200	0.30	23.0	1.20	100	SMA	-30~+70
2700~3100	400	0.30	20.0	1.25	100	SMA	-30~+70
3100~3400	300	0.30	20.0	1.20	100	SMA	-30~+70
3400~3600	200	0.30	20.0	1.20	100	SMA	-30~+70
3600~4000	400	0.30	20.0	1.25	100	SMA	-30~+70

Outline Drawings

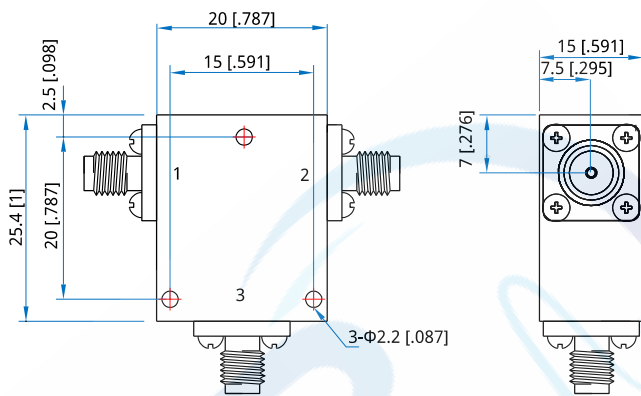

Unit: mm [inch]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size*1: 20*25.4*15mm
0.787*1*0.591in

Mounting: 3-Φ2.2mm through-hole

[1] Exclude connectors

Connector Naming Rules:

S - SMA Female

Direction Naming Rules:

- 1 - Clockwise
- 2 - Anticlockwise

How To Order

NCC2025B-V-W-X-Y-Z

V: Start frequency in MHz

W: Stop frequency in MHz

X: Average power in W

Y: Connector type

Z: Direction type

Examples:

To order a NCC2025B series Circulator, 1700~1900MHz, 100W, SMA female, Clockwise, specify NCC2025B-1700-1900-K1-S-1.

Customization is available upon request.