

NCC6466E

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Description


NCC6466E series Coaxial Circulators cover frequency range 70~200MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power*1 (W)	Connector	Temperature (°C)
130~160	2	0.50	20.0	1.25	10~500	SMA, N	-20~+70
130~160	5	0.60	18.0	1.30	10~500	SMA, N	-20~+70
150~180	30	0.60	18.0	1.30	10~500	SMA, N	-20~+70
160~200	10	0.40	23.0	1.20	10~500	SMA, N	-20~+70
160~200	30	0.50	20.0	1.25	10~500	SMA, N	-20~+70
160~190	30	0.50	10.0	1.25	10~500	SMA, N	-20~+70

[1] The connector is SMA, and the maximum average power can only reach 100W

Outline Drawings

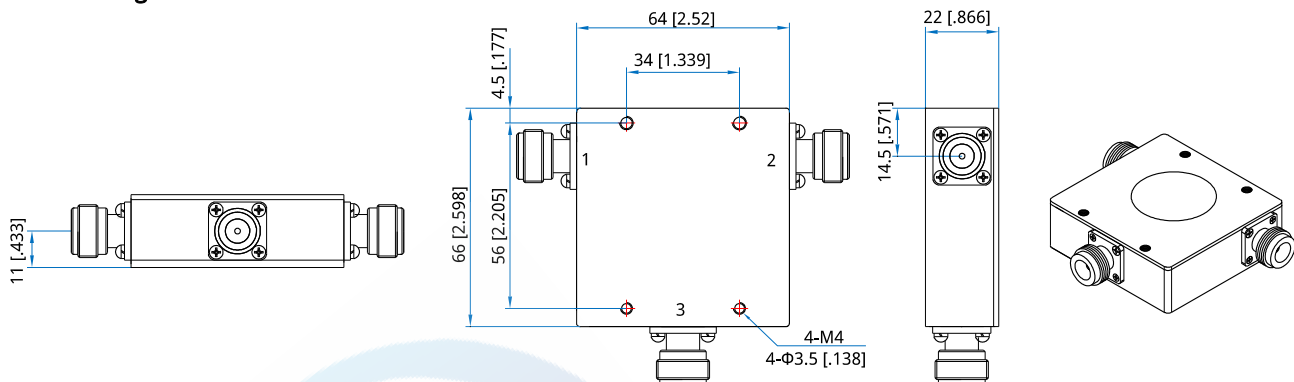

Unit: mm [inch]

Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*2: 64*66*22mm

2.52*2.598*0.866in

Mounting: 4-Φ3.5mm through-hole

4-M4

[2] Exclude connectors

Connector Naming Rules:

N - N Female

Examples:

To order a NCC6466E series Circulator, 70~90MHz, 100W, N female, Clockwise, specify NCC6466E-70-90-K1-N-1.

Customization is available upon request.

Direction Naming Rules:

1 - Clockwise

2 - Anticlockwise

How To Order

NCC6466E-V-W-X-Y-Z

V: Start frequency in MHz

W: Stop frequency in MHz

X: Average power in W

Y: Connector type

Z: Direction type

Z: Direction type

Examples:

To order a NCC6466E series Circulator, 70~90MHz, 100W, N female, Clockwise, specify NCC6466E-70-90-K1-N-1.

Customization is available upon request.