

NCC8080E

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

NCC8080E series Coaxial Circulators cover frequency range 150~890MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power (W)	Connector	Temperature (°C)
150~180	30	0.60	19.0	1.25	100~1000	7/16 DIN	-30~+75
160~190	30	0.50	20.0	1.25	100~1000	7/16 DIN	-30~+75
810~890	80	0.50	25.0	1.25	100~1000	7/16 DIN	-30~+75

Outline Drawings

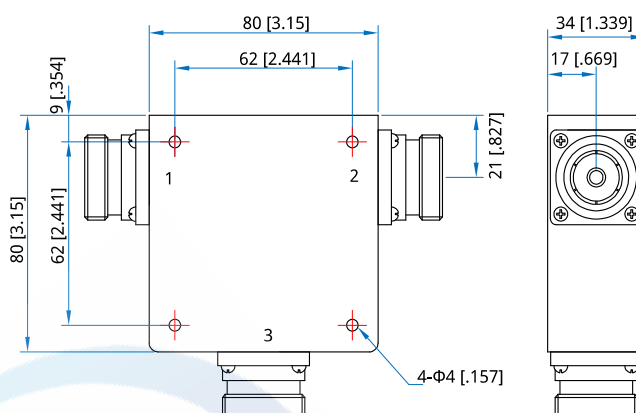

Unit: mm [inch]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size^{*1}: 80*80*34mm

3.15*3.15*1.339in

Mounting: 4-Φ4mm through-hole

[1] Exclude connectors

Connector Naming Rules:

7 - 7/16 DIN Female

Direction Naming Rules:

1 - Clockwise

2 - Anticlockwise

How To Order

NCC8080E-V-W-X-Y-Z

V: Start frequency in MHz

W: Stop frequency in MHz

X: Average power in W

Y: Connector type

Z: Direction type

Examples:

To order a NCC8080E series Circulator, 160~190MHz, 1000W, 7/16 DIN female, Clockwise, specify NCC8080E-160-190-1K-7-1.

Customization is available upon request.