

NCI-1000-2000-K3-K2-N-1

1~2GHz, 300W/200W, N Female, Clockwise

- | | |
|----------------------|-------------------|
| Features: | Applications: |
| * Broadband | * Wireless |
| * High Power | * Radar |
| * Low Insertion Loss | * Laboratory Test |

Electrical

Frequency:	1~2GHz
VSWR:	1.6 max.
Insertion Loss:	0.6dB max.
Isolation:	16dB min.
Forward Power:	300W
Reverse Power:	200W

Mechanical


Size ^{*1} :	64*66*26mm 2.52*2.598*1.024in
RF Connectors:	N Female
Mounting:	3-M2.5, depth 4mm
Direction:	Clockwise

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

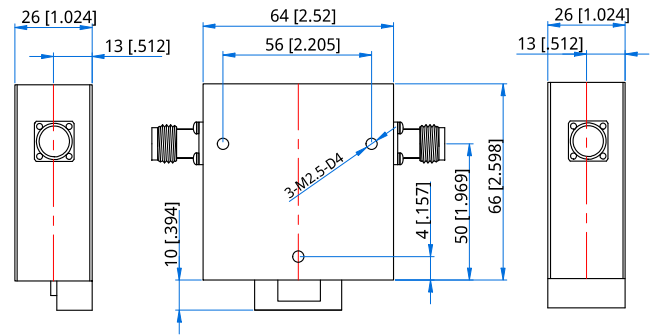

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NCI-1000-2000-K3-K2-N-1

Customization is available upon request.