

NCI-5600-5800-K2-50-N-1

5.6~5.8GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test

Electrical

Frequency:	5.6~5.8GHz
Insertion Loss:	0.3dB max.
Isolation:	20dB min.
VSWR:	1.25 max.
Forward Power:	200W
Reverse Power:	50W

Mechanical


Size ^{*1} :	34*47*35.4mm 1.339*1.85*1.394in
RF Connectors:	N Male N Female
Mounting:	3-Φ3.2mm through-hole

[1] Exclude connectors and termination.

Environmental

Temperature:	0~+60°C
--------------	---------

Outline Drawings

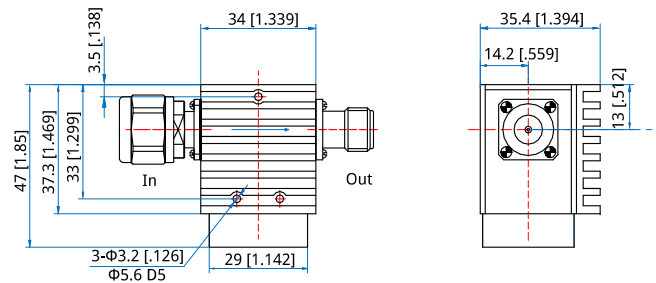

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NCI-5600-5800-K2-50-N-1

Customization is available upon request.