

NCI3033X

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

NCI3033X series Coaxial Isolators cover frequency range 700~3000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	IL (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power*1 (W Max.)	Rev Power (W)	Connector	Temperature (°C)
700~1300	100	0.30	23.0	1.20	100	10~100	SMA	-30~+70
700~1300	200	0.40	20.0	1.25	100	10~100	SMA	-30~+70
700~900	200	0.40	20.0	1.25	100	10~100	SMA	-30~+70
800~1000	200	0.40	20.0	1.25	100	10~100	SMA	-30~+70
890~960	70	0.25	25.0	1.15	100	10~100	SMA	-30~+70
950~1450	500	0.60	15.0	1.45	100	10~100	SMA	-30~+70
960~1215	255	0.30	21.0	1.20	100	10~100	SMA	-30~+70
960~1260	300	0.45	20.0	1.25	100	10~100	SMA	-30~+70
1030~1090	60	0.25	25.0	1.15	100	10~100	SMA	-30~+70
1290~1310	20	0.25	25.0	1.15	100	10~100	SMA	-30~+70
1300~3000	200	0.30	23.0	1.20	100	10~100	SMA	-30~+70
1300~3000	300	0.45	18.0	1.30	100	10~100	SMA	-30~+70
1350~1850	500	0.60	15.0	1.45	100	10~100	SMA	-30~+70
1400~1700	300	0.45	20.0	1.25	100	10~100	SMA	-30~+70
1700~2300	600	0.50	20.0	1.25	100	10~100	SMA	-30~+70
1900~2200	300	0.40	20.0	1.25	100	10~100	SMA	-30~+70
2100~2700	600	0.50	18.0	1.35	100	10~100	SMA	-30~+70
2200~2400	200	0.30	23.0	1.20	100	10~100	SMA	-30~+70
2300~2700	400	0.40	20.0	1.25	100	10~100	SMA	-30~+70
2500~2700	200	0.30	23.0	1.20	100	10~100	SMA	-30~+70
2700~2900	200	0.30	23.0	1.20	100	10~100	SMA	-30~+70
2800~3000	200	0.30	23.0	1.20	100	10~100	SMA	-30~+70

The size of the termination varies according to the reverse power

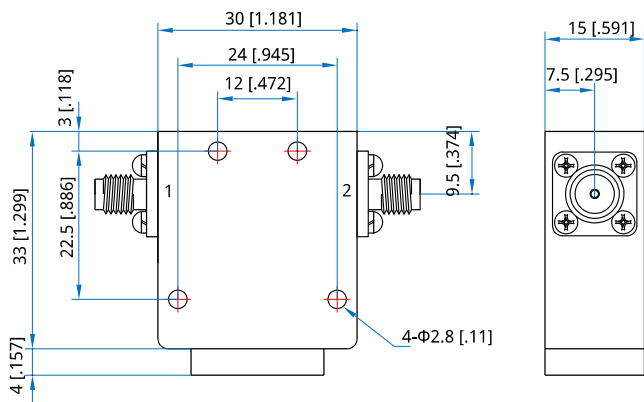

Unit: mm [inch] Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*2:	30*33*15mm
	1.181*1.299*0.591in
Mounting:	4-Φ2.8mm through-hole
[2] Exclude connectors and terminations.	

Connector Naming Rules:

S - SMA Female

Direction Naming Rules:

- 1 - Clockwise
- 2 - Anticlockwise

How To Order

NCI3033X-U-V-W-X-Y-Z

- U: Start frequency in MHz
- V: Stop frequency in MHz
- W: Forward power in W
- X: Reverse power in W
- Y: Connector type
- Z: Direction type

Examples:

To order a NCI3033X series Isolator, 1400~1600MHz, Forward power 100W, Reverse power 100W, SMA female, Clockwise, specify NCI3033X-1400-1600-K1-K1-S-1.

Customization is available upon request.