

NMS2KH

DC~43.5GHz, SPDT

Features:

- * Low VSWR
- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~43.5GHz
Impedance: 50Ω

Model	Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
NMS2KH-40	DC-26.5	0.40	75	1.3
	26.5-40	0.65	70	1.5
NMS2KH-43.5	DC-40	0.40	75	1.3
	40-43.5	1.00	60	1.6

Voltage *1(V)	+12	+24	+28
Current (mA)	Failsafe 195	100	95
	Latching 230	140	120

[1] The voltage can be selected according to user requirements.


Mechanical

Switching Sequence:	Break before Make
Switching Time:	15mS max.
Operation Life:	2M Cycles
Vibration (operating):	20-2000Hz, 10G RMS
Mechanical Shock (non-operating):	30G, 1/2sine, 11mS
RF Connectors:	2.92mm Female
Power Supply & Control Interface Connectors:	Feed Through/Terminal Post or D-Sub 9

Environmental

Temperature:	-25~+65°C
Extended Temperature:	-45~+85°C

Outline Drawings

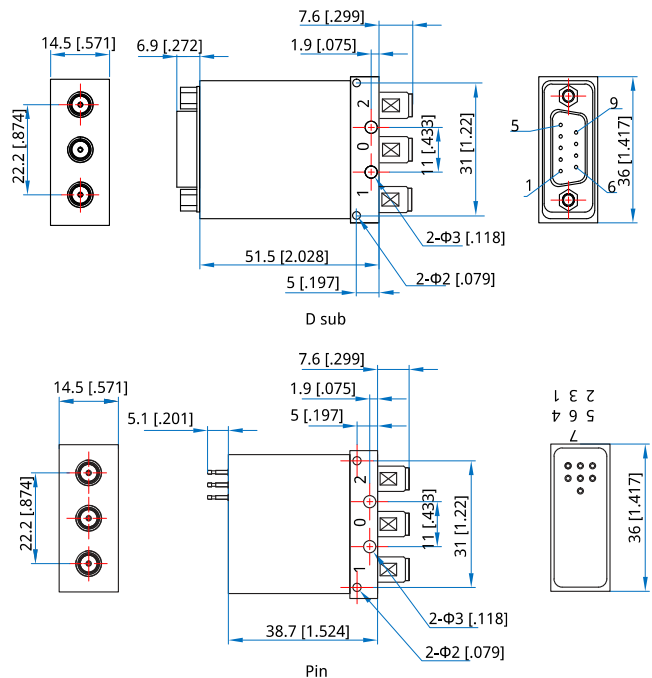

Unit: mm [in]

Tolerance: ±0.5mm [±0.00in]

Additional Options

TTL: T

Indicators: I

Extended Temperature: Z

Positive Common

Waterproof Sealing Type

How To Order

NMS2KH-F-WXYZ

F: Frequency in GHz

W: Actuator Type. Failsafe: 0, Latching: 1.

X: Voltage. +12V: E, +24V: K, +28V: M.

Y: Power Interface. Pin: 0, D-Sub: 1.

Z: Additional Options.

Examples:

To order a SPDT switch, High performance,DC-40GHz, Failsafe, +12V, D-Sub, TTL, Indicators, specify NMS2KH-40-0E1TI.

Customization is available upon request.

Pin Numbering

Failsafe

Pin	Function	Pin	Function
1	VDC(RF: 0 to 2)	4~5	Indicator (1~2)
2	NC	6	Indicator (COM)
3	COM(RF: 0 to 2)	7~9	NC

Failsafe&TTL

Pin	Function	Pin	Function
1	VDC(RF: 0 to 2)	4~5	Indicator (1~2)
2	A1(RF: 0 to 2)	6	Indicator (COM)
3	COM(RF: 0 to 2)	7~9	NC

Latching

Pin	Function	Pin	Function
1	V1(RF: 0 to 1)	4~5	Indicator (1~2)
2	V2(RF: 0 to 2)	6	Indicator (COM)
3	COM	7~9	NC

Latching&TTL

Pin	Function	Pin	Function
1	VDC	5~6	Indicator (1~2)
2	A1(RF: 0 to 1)	7	Indicator (COM)
3	COM	8~9	NC
4	A2(RF: 0 to 2)		

Driving Schematic Diagram

