

NCT18K3

DC~18GHz, 300W

Features:
 * Low VSWR
 * Broadband

Applications:
 * Transmitters
 * Antennas
 * Laboratory Test
 * Impedance Matching



Electrical

Frequency Range: DC~18GHz
 Average Power^{*1}: 300W@25°C
 Impedance: 50Ω

[1] Derated linearly to 15W@120°C.

VSWR

Frequency (GHz)	VSWR (max.)
DC~4	1.2
4~8	1.25
8~12.4	1.35
12.4~18	1.45

Mechanical

Size^{*2}: 305*120*110mm
 12.008*4.724*4.331in


Connector: N

[2] Exclude connectors.


Environmental

Temperature: -55~+125°C

Outline Drawings

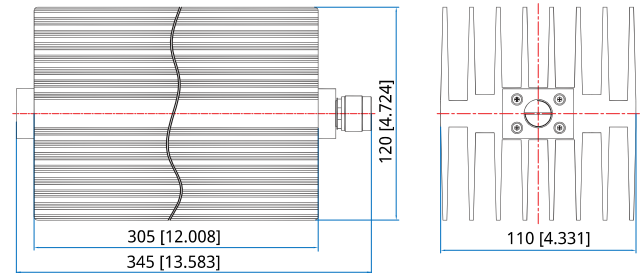

Outline A

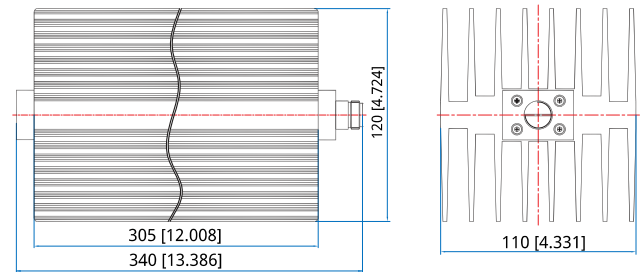

Outline B

Unit: mm [in]
 Tolerance: ±3mm [±0.12in]

How To Order

NCT18K3-X-Y
 X: Frequency in GHz
 Y: Connector type

Connector naming rules:
 N - N male (Outline A)
 NF - N female (Outline B)

Examples:

To order a termination, DC-12.4GHz, N male, specify NCT18K3-12.4-N

Customization is available upon request.