

NDB-10-40000

10MHz~40GHz

Features:

- * Broadband
- * High Sensitivity

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar

Electrical

| | |
|------------------|------------|
| Frequency Range: | 0.01~40GHz |
| Insertion Loss: | 0.8dB max. |
| VSWR: | 1.3 max. |
| Impedance: | 50Ω |
| Voltage: | 50V max. |




Mechanical

| | |
|--------------------|-----------------------------------|
| Connectors: | 2.92mm |
| Mating Life Cycle: | 500 cycles |
| Outer Conductors: | Passivated SUS303 Stainless Steel |
| Dielectric: | PEI |
| Inner Conductors: | Gold Plated Beryllium Copper |

Environmental

Operating Temperature: -55~+165°C

Outline Drawings

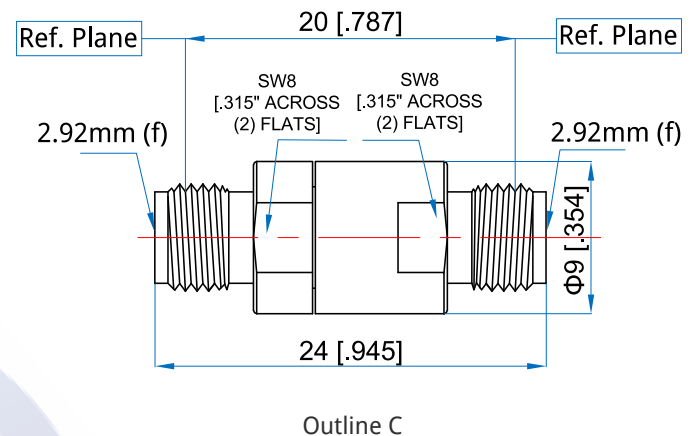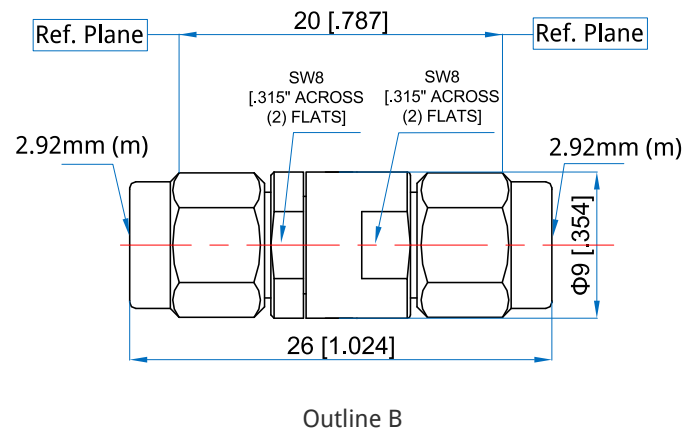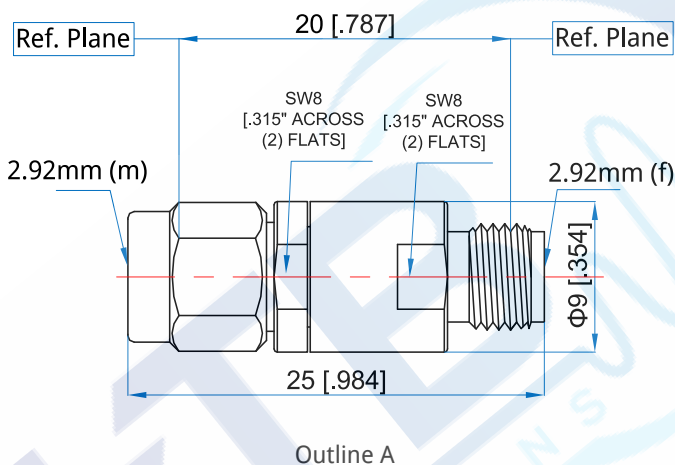

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NDB-10-40000-KKF - Outline A

NDB-10-40000-KK - Outline B

NDB-10-40000-KFKF - Outline C

Customization is available upon request.