

ND-10-26500

Broadband & High Sensitivity

Features:

- * Broadband
- * High Sensitivity

Applications:

- * Telecom
- * Instrumentation
- * Laboratory Test
- * Radar

Electrical

Frequency Range:	0.01~26.5GHz
Sensitivity:	400mV/mW
Flatness:	±1.5dB max.
VSWR:	2 max.
Polarity:	Negative
Input Power Without Damage:	20dBm


Mechanical

Size*1:	Φ9.5*41.6mm Φ0.374*1.638in
Weight:	100g max.
Input Connector:	3.5mm Male
Output Connector:	SMA Female

Environmental

Operating Temperature:	0~+50°C
Non-operating Temperature:	-20~+70°C

Outline Drawings

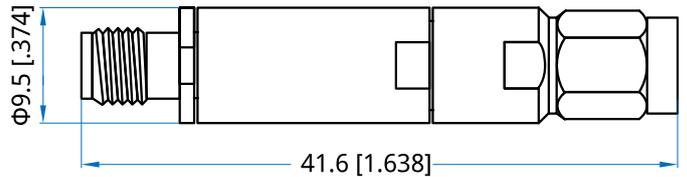

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

ND-10-26500

Customization is available upon request.

