

## NWD-10

### Broadband & High Sensitivity

**Features:**

- \* Broadband
- \* High Sensitivity

**Applications:**

- \* Telecom
- \* Instrumentation
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency Range:	75~110GHz
Sensitivity:	100mV/mW
Flatness:	±2.2dB max.
Polarity:	Negative
Input Power Without Damage:	20dBm


#### Mechanical

Length:	26.5mm 1.043in
Weight:	150g max.
Input Connector:	WR-10
Output Connector:	SMA Female

#### Environmental

Operating Temperature:	0~+50°C
Non-operating Temperature:	-20~+70°C

#### Outline Drawings

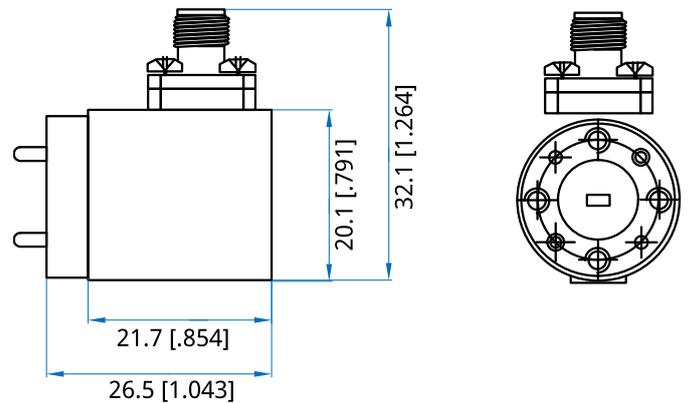

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

#### HowToOrder

**NWD-10**

Customization is available upon request.

