

NDC4545X

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

NDC4545X series Drop-In Circulators cover frequency range 300~1000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power (W)	Temperature (°C)
300~420	20	0.30	23.0	1.20	100~400	-30~+70
300~420	30	0.40	20.0	1.25	100~400	-30~+70
300~420	120	0.60	18.0	1.30	100~400	-30~+70
361~366	5	0.20	30.0	1.15	100~400	-30~+70
400~470	70	0.40	20.0	1.25	100~400	-30~+70
400~500	30	0.30	23.0	1.20	100~400	-30~+70
400~500	100	0.40	20.0	1.25	100~400	-30~+70
500~700	50	0.40	20.0	1.25	100~400	-30~+70
500~700	150	0.50	18.0	1.30	100~400	-30~+70
700~900	200	0.40	20.0	1.25	100~400	-30~+70
700~1000	300	0.50	18.0	1.30	100~400	-30~+70
800~1000	200	0.40	20.0	1.20	100~400	-30~+70
800~1100	300	0.50	18.0	1.30	100~400	-30~+70

Outline Drawings

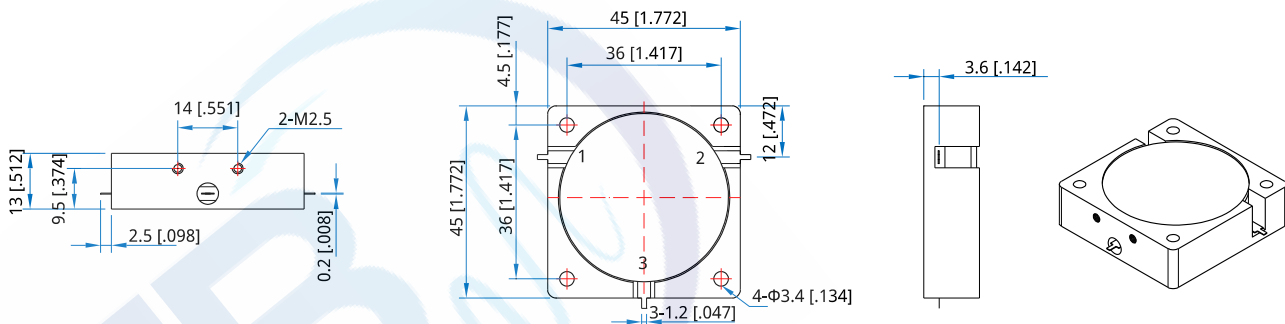

Unit: mm [inch]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Size*1: 45*45*13mm
1.772*1.772*0.512in
Connector Type: Strip line
Mounting: 4-Φ3.4mm through-hole
2-M2.5

[1] Exclude connectors

How To Order

NDC4545X-X-Y-Z

X: Start frequency in MHz

Y: Stop frequency in MHz

Z: Average Power in W

Examples:

To order a NDC4545X series Circulator, 320~330MHz, 200W,
specify NDC4545X-320-330-K2.

Customization is available upon request.