

NDC6060H

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

NDC6060H series Drop-In Circulators cover frequency range 20~400MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Average Power (W)	Temperature (°C)
20~30	0	2.00	18.0	1.30	10~100	-10~+60
30~80	0	1.20	20.0	1.25	10~100	-10~+60
30~80	5	1.80	18.0	1.30	10~100	-10~+60
88~108	20	0.60	20.0	1.25	10~100	-10~+60
100~140	40	1.20	18.0	1.30	10~100	-10~+60
108~118	10	0.50	20.0	1.20	10~100	-10~+60
116~138	22	0.60	20.0	1.25	10~100	-10~+60
130~180	50	0.60	20.0	1.25	10~100	-10~+60
136~174	38	0.50	20.0	1.25	10~100	-10~+60
150~170	20	0.40	20.0	1.20	10~100	-10~+60
170~230	60	0.60	20.0	1.25	10~100	-10~+60
225~400	175	0.80	18.0	1.30	10~100	-10~+60

Outline Drawings

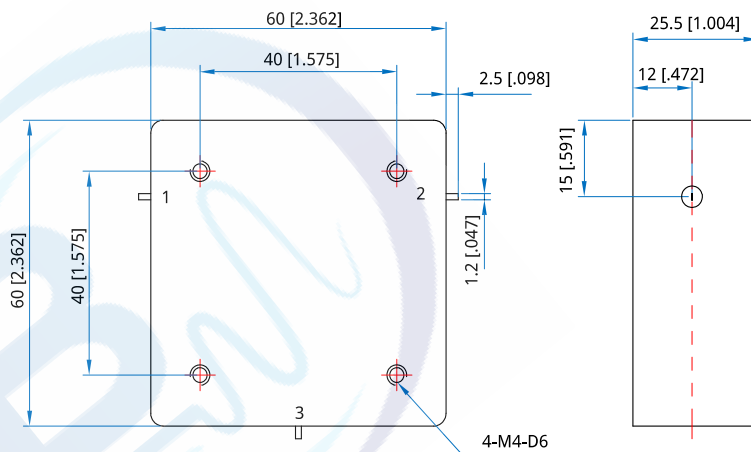

Unit: mm [inch]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]



Drop-In Circulators

Mechanical

Size*1:	60*60*25.5mm 2.362*2.362*1.004in
Connector Type:	Strip line
Mounting:	4-M4, depth 6mm

[1] Exclude connectors

How To Order

NDC6060H-X-Y-Z

X: Start frequency in MHz

Y: Stop frequency in MHz

Z: Average Power in W

Examples:

To order a NDC6060H series Circulator, 70~75MHz, 50W, specify NDC6060H-70-75-50.

Customization is available upon request.