

NBDC-2000-4000-K4-40-NS

2~4GHz, 400W, 40dB

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~4GHz
Insertion Loss:	0.5dB max.
Coupling:	40±1.5dB
VSWR:	1.3 max.
Average Power:	400W min.
Directivity:	10dB min.


[1] Derated linearly to 0.5W@120°C.

Mechanical

Size ^{*1} :	50*50*22.6mm 1.969*1.969*0.89in
Connectors:	SMA Female, N Female
Mounting:	2-M2.5, depth 6mm

[1] Exclude connectors.

Outline Drawings

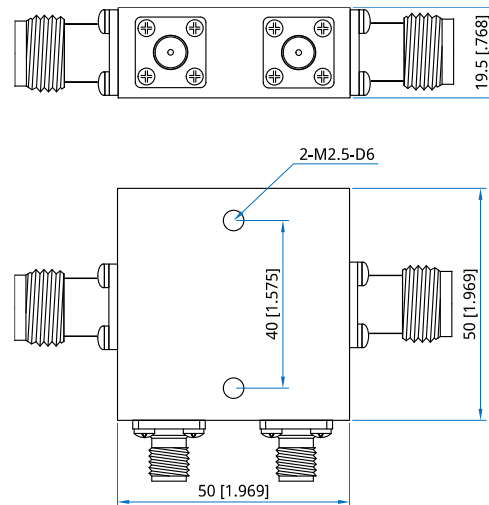

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBDC-2000-4000-K4-40-NS

Customization is available upon request.