

NDDC-1900-2200-50-10-NS

1.9~2.2GHz, 50W, 10dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	1.9~2.2GHz
Insertion Loss:	1.5dB max.
VSWR:	1.2 max.
Directivity:	20dB min.
Coupling:	10±1dB
Average Power:	50W
Impedance:	50Ω

Mechanical


Size*1:	140*20*20mm 5.512*0.787*0.787in
Connectors:	SMA Female, N Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and termination

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings

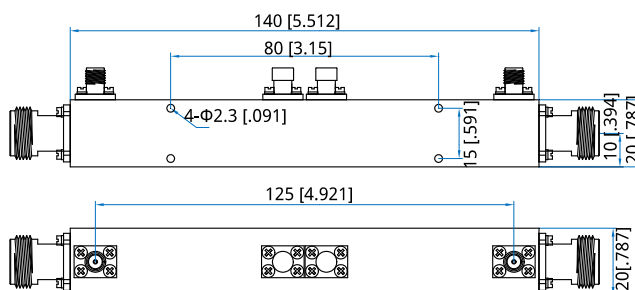

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NDDC-1900-2200-50-10-NS

Customization is available upon request.