

NDDC-20-520-50-50-S

0.02~0.52GHz, 50W, 50dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.02~0.52GHz
Insertion Loss:	0.35dB max.
VSWR:	1.25 max.
Directivity:	20dB min.
Frequency Sensitivity:	± 0.6 dB
Coupling:	50 ± 1 dB
Average Power:	50W
Impedance:	50 Ω

Mechanical


Size* ¹ :	58*44*15mm 2.283*1.732*0.591in
Connectors:	SMA Female
Mounting:	4- $\Phi 2.8$ mm through-hole

[1] Exclude connectors

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

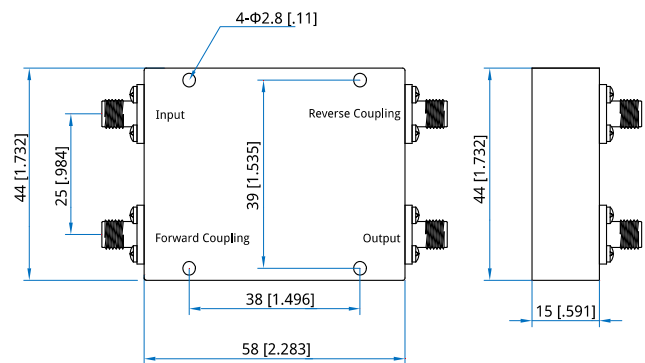

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

NDDC-20-520-50-50-S

Customization is available upon request.