

## NDDC-400-2000-K3-40-N

0.4~2GHz, 300W, 40dB

### Features:

\* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical


Frequency:	0.4~2GHz
Coupling:	40±1dB
VSWR:	1.3 max.
Insertion Loss:	0.35dB max.
Directivity:	20dB min.
Average Power:	300W max.

### Mechanical

Size*1:	410*102*36mm 16.142*4.016*1.417in
Connectors:	N Female
Mounting:	8-Φ5mm through-hole

[1] Exclude connectors

### Outline Drawings

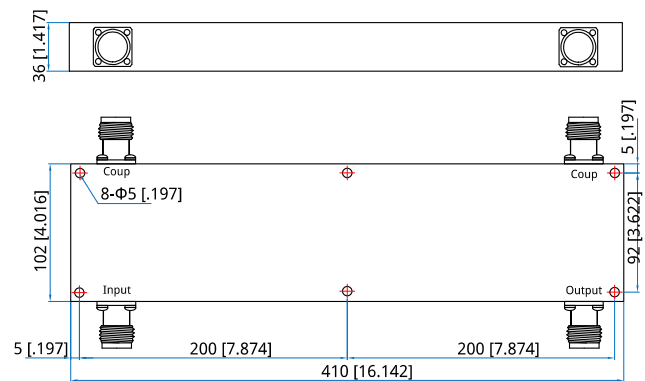

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**NDDC-400-2000-K3-40-N**

Customization is available upon request.