

NDDC-6000-18000-70-40-S

6~18GHz, 70W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	6~18GHz
Insertion Loss:	0.5dB max.
Coupling:	40±2.5dB
Coupling Flatness:	±0.75dB max.
Directivity:	15dB min.
VSWR:	1.4 max.
Average Power:	70W max.

Mechanical


Size*1:	45*32*14mm 1.772*1.26*0.551in
RF Connectors:	SMA Female
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors and termination

Environmental

Operating Temperature:	-40~+60°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

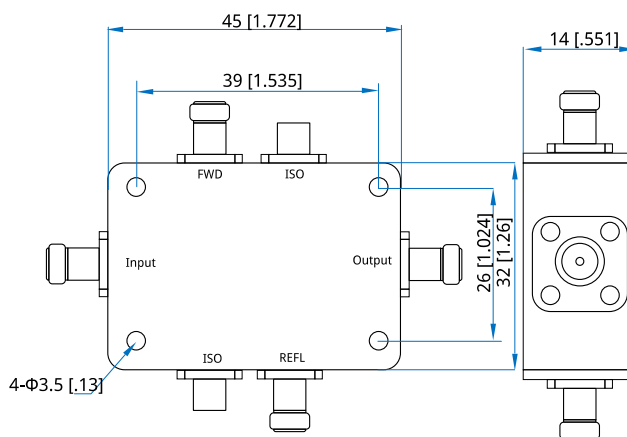

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NDDC-6000-18000-70-40-S

Customization is available upon request.