

NDDC-700-6000-50-30-S

0.7~6GHz, 50W, 30dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.7~6GHz
Insertion Loss:	1.2dB max.
Coupling:	30±1.5dB
Directivity:	10dB min.
VSWR:	1.4 max.
Average Power:	50W
Impedance:	50Ω

Mechanical

Size* ¹ :	202*16*11mm 7.953*0.63*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors

Outline Drawings

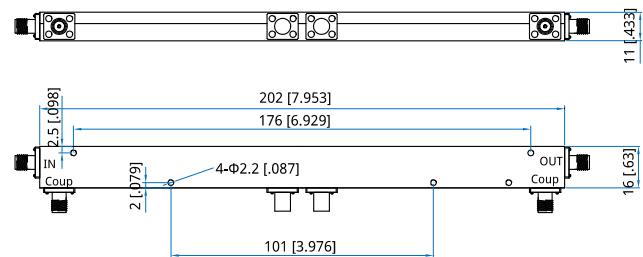

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NDDC-700-6000-50-30-S

Customization is available upon request.