

NPX 1842-1747 MHz DPX S Duplexer, 1805-1880 MHz / 1710-1785 MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency: 1805-1880 MHz / 1710-1785 MHz

Insertion Loss: 0.8dB max.

Pass Band Ripple: 0.6dB max.

Return Loss: 20.0dB min.

Rejection: 50dB min.

Impedance: 50Ω

Input Power Handling: 100 W @ each input port per port.

Mechanical

Dimension (W*D*H): 106*116*30

Finish: Silver plating

Connectors: SMA Female


Mounting: 4-ΦM3x0.5p DP8.0 through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -40~+70°C

Outline Drawings

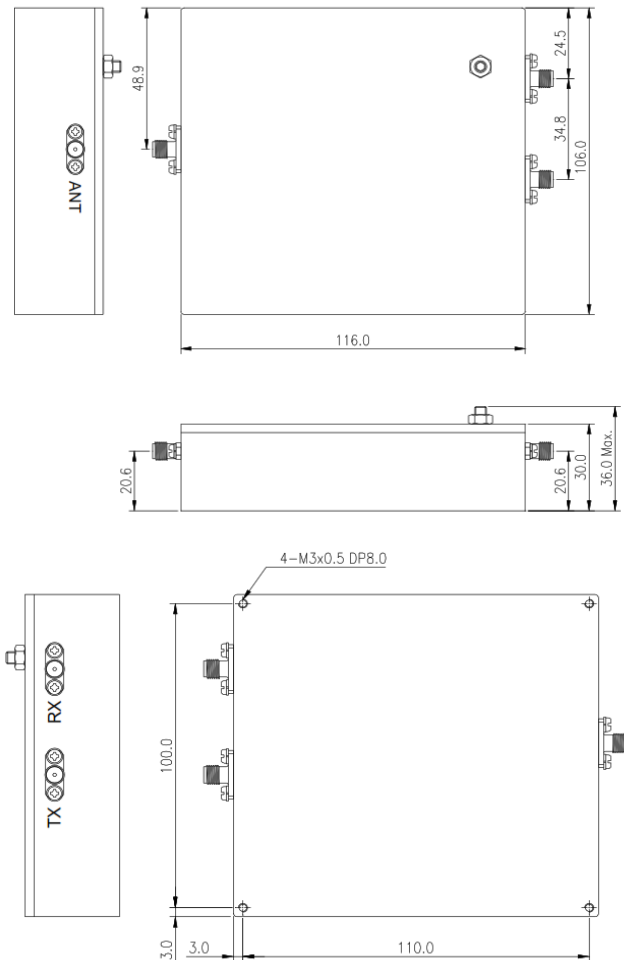

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NPX 1842-1747 MHz DPX S

Customization is available upon request.

