

## NPX 2140-1950 MHz DPX S

Dublexer, 2110-2170 MHz / 1920-1980 MHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency: 2110-2170 MHz / 1920-1980 MHz

Insertion Loss: 0.4dB max.

Pass Band Ripple : 0.3dB max.

Return Loss : 20.0dB min.

Rejection: 50dB min.

Impedance: 50Ω

Input Power Handling: 100 W @ each input port per port.

### Mechanical

Dimension (W\*D\*H): 116\*106\*30

Finish: Silver plating

Connectors: SMA Female


Mounting: 4-ΦM3x0.5p DP8.0 through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature: -40~+70°C

### Outline Drawings

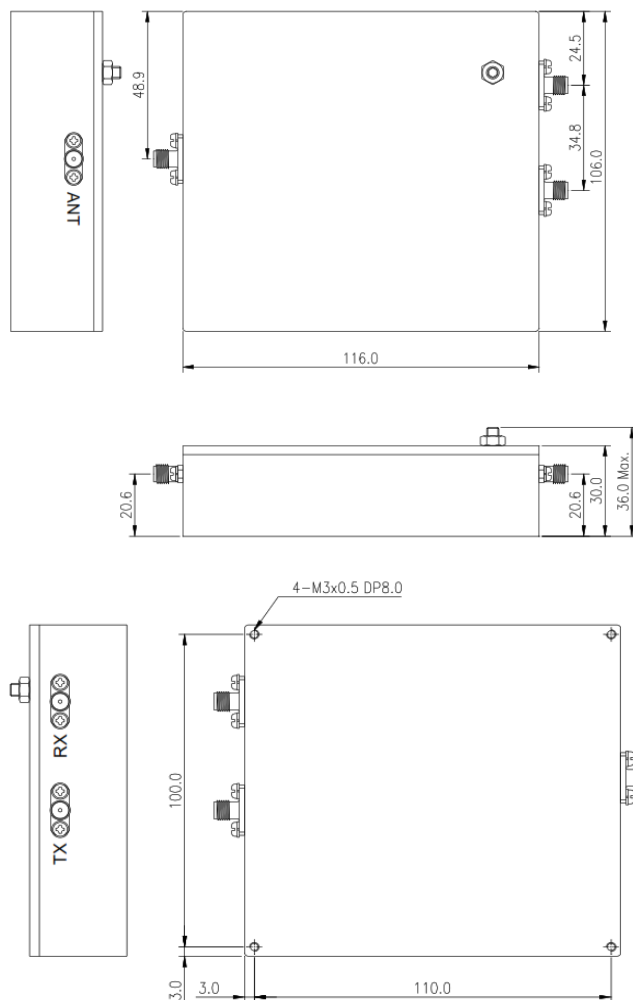

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**NPX 2140- 1950 MHz DPX S**

Customization is available upon request.

