

NPX 2655-2535 MHz DPX S Duplexer, 2620-2690 MHz / 2500-2570 MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency: 2620-2690 MHz / 2500-2570 MHz

Insertion Loss: 0.5dB max.

Pass Band Ripple : 0.3dB max.

Return Loss : 20.0dB min.

Rejection: 50dB min.

Impedance: 50Ω

Input Power Handling: 100 W @ each input port per port.

Mechanical

Dimension (W*D*H): 116*106*30

Finish: Silver plating

Connectors: SMA Female

Mounting: 4-ΦM3x0.5p DP8.0 through-hole

[1] Exclude connectors.

Environmental



Operation Temperature: -40~+70°C

How To Order

NPX 2655-2535 MHz DPX S

Customization is available upon request.

Outline Drawings

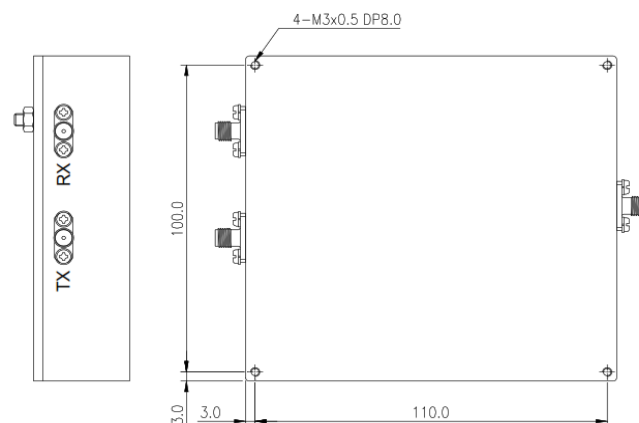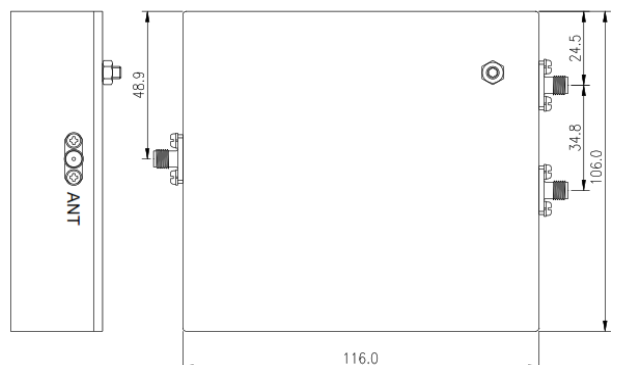

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

