

NELC-K-2

2.92mm, DC~40GHz

Features:

- * Low VSWR
- * No welding
- * Reusable
- * Easy installation

Applications:

- * Laboratory Test

Electrical

Frequency: DC~40GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical

RF Connector: 2.92mm
Outer Conductor: Passivated stainless steel
Dielectric: PEI & PTFE
Inner Conductor: Gold plated beryllium copper

Environmental

Temperature: -55~+165°C


How To Order

NELC-K-2 - Outline A


NELC-KF-2 - Outline B

Customization is available upon request.

Outline Drawings

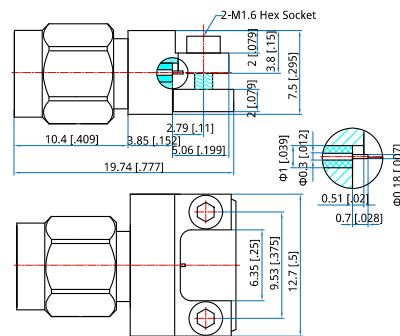

Outline A

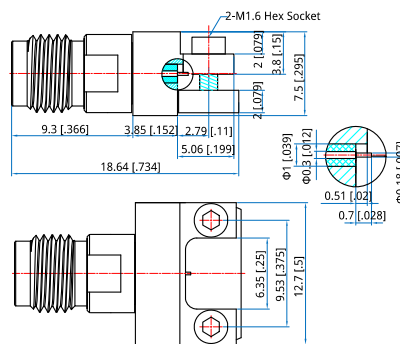

Outline B

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]