

## NELC-KF-5

2.92mm, DC~40GHz

### Features:

- \* Low VSWR
- \* No welding
- \* Reusable
- \* Easy installation

### Applications:

- \* Laboratory Test

### Electrical

Frequency: DC~40GHz  
VSWR: 1.35 max.  
Impedance: 50Ω


### Mechanical

RF Connector: 2.92mm female  
Outer Conductor: Gold plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -40~+105°C

### Outline Drawings

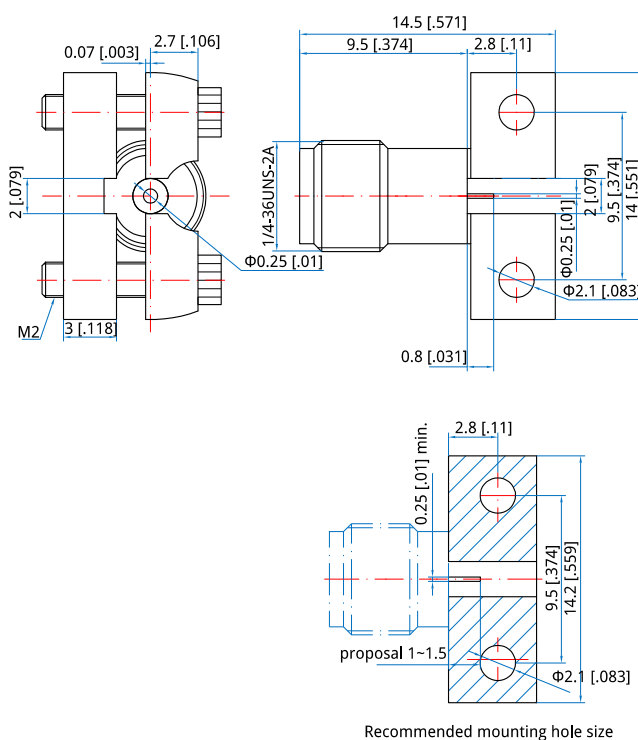

Recommended mounting hole size

### How To Order

NELC-KF-5

Customization is available upon request.

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in](Screw sleeve)