

NFM2-20000-50000-16

20~50GHz, 16dBm

Features:

- * Broadband
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Input Frequency:	10~25GHz
Output Frequency:	20~50GHz
Input Power:	5~10dBm
Output Power:	+16dBm min.
Multiple Ratio:	2
Harmonic (1F):	-30dBc typ.
(3F):	-35dBc typ.
(4F):	-12dBc typ.
Input VSWR:	1.7 typ.
Output VSWR:	1.45 typ.
Voltage:	+5V DC
Current:	0.4A typ.
Impedance:	50Ω

Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
RF Connectors:	2.4mm
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

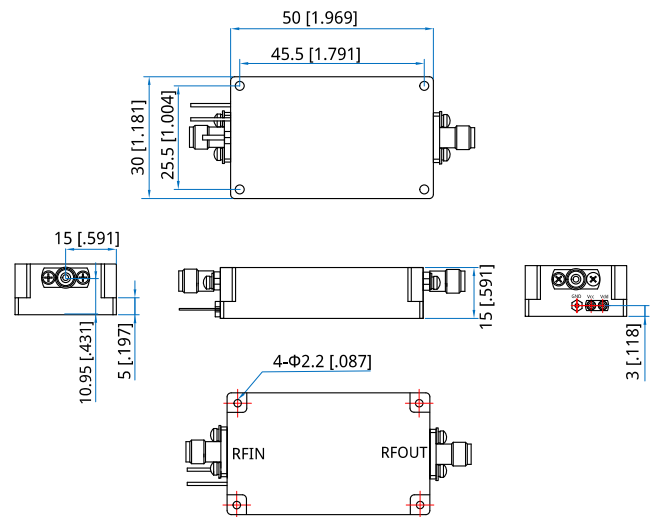

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NFM2-20000-50000-16

Customization is available upon request.