

NHF-11000-42000-60
 11~42GHz, 60dB

- Features:

 - * High Stopband Rejection
 - * Small Size
- Applications:

 - * Telecom
 - * Laboratory Test
 - * Receivers
 - * Instrumentation

Electrical

Passband:	11~42GHz
Passband Insertion Loss:	3.5dB max.
VSWR:	2.2 max.
Stopband Attenuation:	60dBc@DC~10GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4-Φ2.3mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

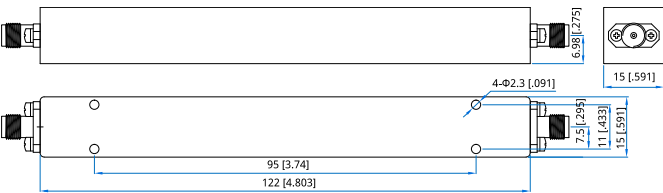

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

NHF-11000-42000-60

Customization is available upon request.