




kD101 Noise Diodes

10 Hz to 8 GHz




kTB Noise Diodes

KTB's noise diodes are the fundamental building blocks of all noise systems. They are hand-picked for performance characteristics that make them ideally suited to broadband noise generation with flat response.

All KTB noise diodes deliver symmetrical white Gaussian noise and flat output power versus frequency. The diodes are hermetically sealed and available in a wide variety of package styles. Special package configurations or screening processes are available upon request.

The KD101 diodes are designed for microwave applications in which a 50-ohm impedance is required.

Model	Frequency Range	ENR (dB)	Impedance (ohm)	Operating Voltage (v)	Bias (mA)	Package Type
KD101	10Hz to 8GHz	30	50	8-12V	8mA (Typical)	Beam Lead

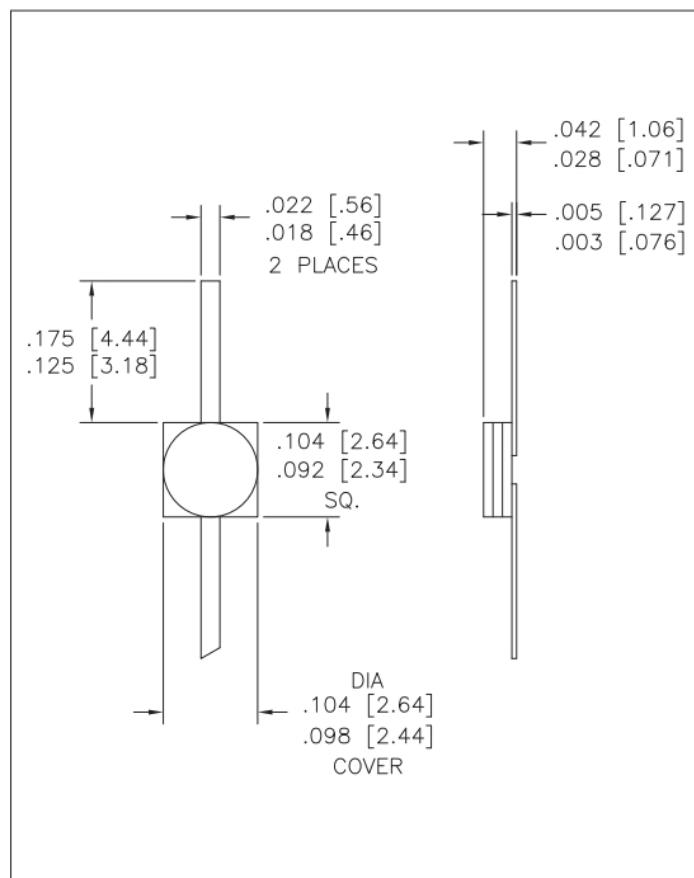

Features

- Custom electrical testing available upon request.
- Wide package variety with custom configurations.
- Can deliver symmetrical white Gaussian noise and flat output power versus frequency.
- Be used for RF and Microwave application
- EMI testing
- Classified based on performance traits that improve their broadband noise output and produce a flat spectral response.