

NLAS-18000-40000-45-40

18~40GHz, 45dB, 4dB

Features:

- * Broadband
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	18~40GHz
Gain:	45dB min.
Gain Flatness:	3.5dB max.
Output Power (P1dB):	10dBm min.
Noise Figure:	3.5dB typ. 4dB max.
Spurious:	-60dBc max.
VSWR:	2 max.
Voltage:	220V AC
Input Power:	+10dBm max.
Impedance:	50Ω

Mechanical

Size*1:	166*106.4*56.4mm 6.535*4.189*2.22in
Weight:	1.5Kg max.
RF Connectors:	2.92mm Female

[1] Exclude connectors, rack mount brackets, handles.

How To Order


NLAS-18000-40000-45-40

Customization is available upon request.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

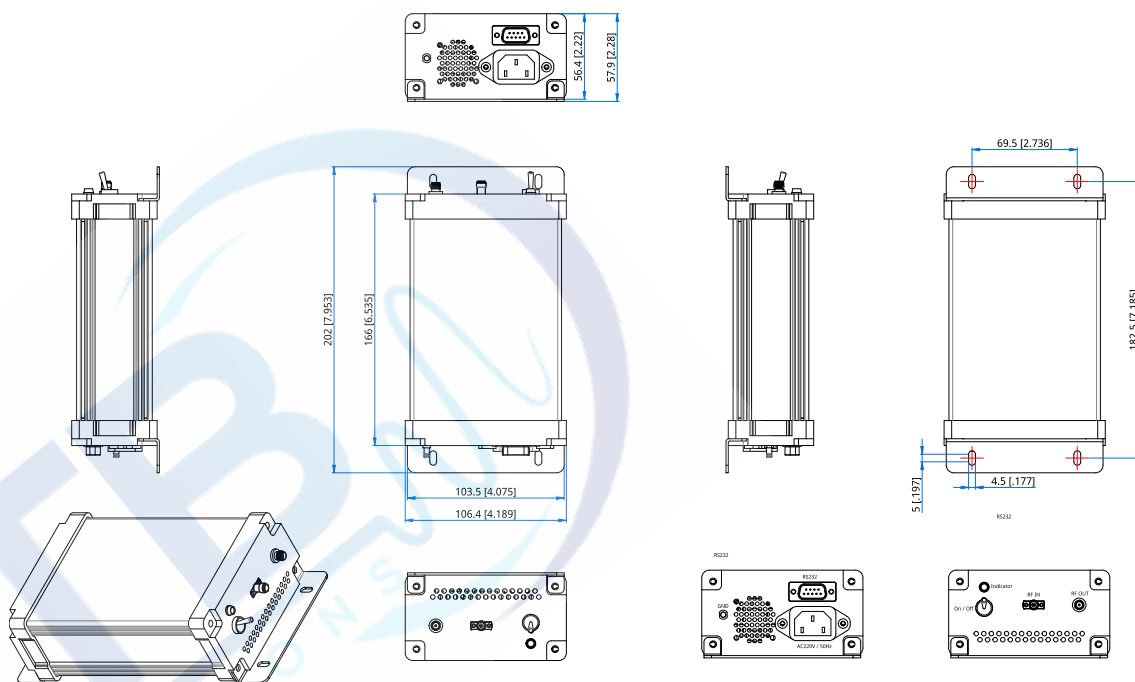

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]