

NLAS-40000-60000-35-70

40~60GHz, 35dB, 7dB

Features:

- * Broadband
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	40~60GHz
Gain:	35dB typ.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	20dBm typ.
Noise Figure:	7dB typ.
Spurious:	-60dBc max.
Harmonic:	-15dBc typ.
VSWR:	2 typ.
Voltage:	220V AC
Impedance:	50Ω


Mechanical

Size*1:	214*218*48mm 8.425*8.583*1.89in
Weight:	2Kg max.
RF Connectors:	1.85mm Female

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

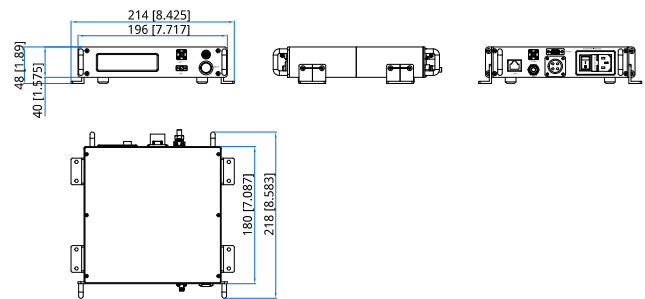

Unit: mm [in]

Tolerance: ±2mm [±0.08in]

How To Order

NLAS-40000-60000-35-70

Customization is available upon request.