

**NLA-10-60-16-50**  
10~60MHz, 16dB, 5dB

Features:  
\* Broad Band  
\* Low Noise

Applications:  
\* Wireless  
\* Receiver  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency:	10~60MHz
Gain:	16dB min.
Gain Flatness:	±1.5dB
Output Power (P1dB):	23dBm
Noise Figure:	5dB max.
Spurious:	-60dBc max.
Voltage:	+5V DC

**Mechanical**


Size*1:	48.5*29mm 1.909*1.142in
RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-40~+60°C
------------------------	-----------

**Outline Drawings**

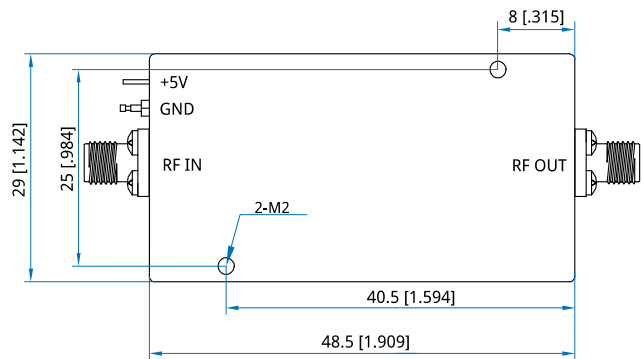

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**  
**NLA-10-60-16-50**

Customization is available upon request.

