

NLA-18000-26500-48-25

18~26.5GHz, 48dB, 2.5dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	18~26.5GHz
Gain:	48dB min.
Gain Flatness:	±2.5dB max.
Output Power (P1dB):	10dBm min.
Noise Figure:	2.5dB max.
VSWR:	2.3 max.
Voltage:	+12V typ.
Current:	240mA typ.
Impedance:	50Ω

Mechanical


Size*1:	17.8*16.2*7.4mm 0.701*0.638*0.291in
RF Connectors:	2.92mm Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-Operating Temperature:	-55~+100°C

Outline Drawings

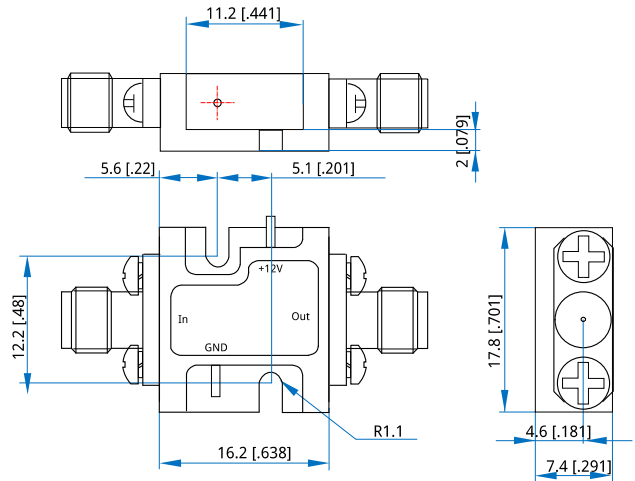

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order

NLA-18000-26500-48-25

Customization is available upon request.