

**NLA-18000-40000-25-50(P15)**  
 18~40GHz, 25dB, 5dB

Features:  
 \* Broad Band  
 \* Low Noise

Applications:  
 \* Wireless  
 \* Receiver  
 \* Laboratory Test  
 \* Radar

**Electrical**

Frequency:	18~40GHz
Gain:	25dB min.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	+15dBm min.
Noise Figure:	5dB typ.
Spurious:	-60dBc max.
VSWR:	2 typ.
Voltage:	+12V DC
Current:	300mA typ.
Impedance:	50Ω
Input Power:	+5dBm max.

**Mechanical**


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

**Outline Drawings**

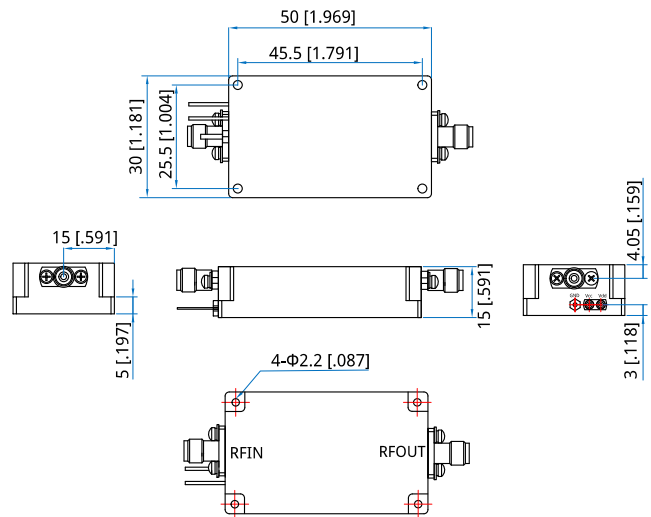

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NLA-18000-40000-25-50(P15)**

Customization is available upon request.

