

**NLA-18000-40000-50-45**  
18~40GHz, 50dB, 4.5dB

Features:  
\* Broad Band  
\* Low Noise

Applications:  
\* Wireless  
\* Receiver  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency:	18~40GHz
Gain:	50dB min.
Gain Flatness:	±3dB typ.
Output Power (P1dB):	+5dBm min.
Noise Figure:	4.5dB typ.
Spurious:	-60dBc max.
VSWR:	2 typ.
Voltage:	+15V DC
Current:	400mA typ.
Impedance:	50Ω
Input Power:	+5dBm max.

**Mechanical**


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

**Outline Drawings**

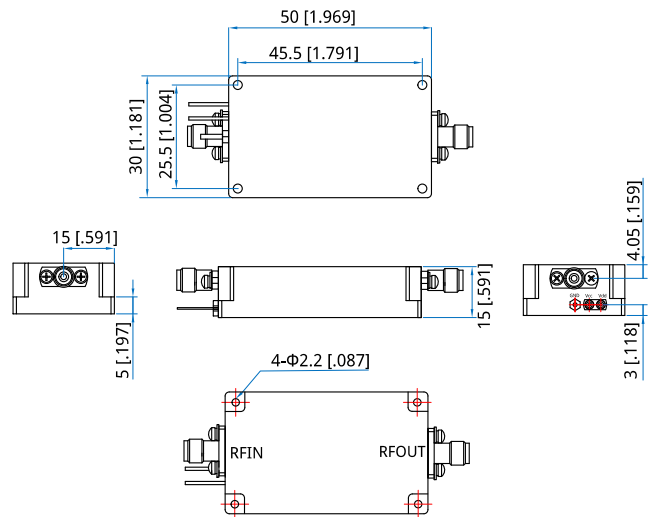

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NLA-18000-40000-50-45**

Customization is available upon request.