

NLA-25-1000-50-13
 25~1000MHz, 50dB, 1.3dB

Features:
 * Broad Band
 * Low Noise

Applications:
 * Wireless
 * Receiver
 * Laboratory Test
 * Radar

Electrical

Frequency:	25~1000MHz
Gain:	50dB min.
Output Power (P1dB):	14dBm typ.
Noise Figure:	1.3dB max.
VSWR:	2.5 max.
Voltage:	5~20V DC
Current:	200mA max.
Impedance:	50Ω

Mechanical


Size*1:	60*30*20mm 2.362*1.181*0.787in
RF Connectors:	N Female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

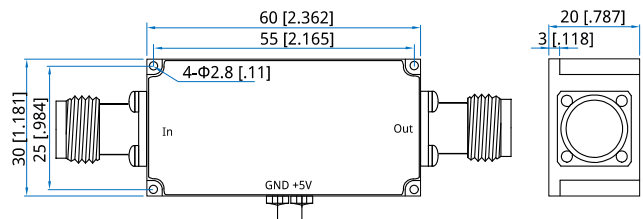

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]

How To Order
[NLA-25-1000-50-13](#)

Customization is available upon request.

