

NLA-26500-40000-25-40
26.5~40GHz, 25dB, 4dB

Features:
* Broadband
* Low Noise

Applications:
* Wireless
* Receiver
* Laboratory Test
* Radar

Electrical

Frequency:	26.5~40GHz
Gain:	25dB min.
Gain Flatness:	±2dB typ.
Output Power:	0dBm max.
Noise Figure:	4dB typ.
Spurious:	-60dBc max.
Input Power:	0dBm
VSWR:	1.8 typ.
Voltage:	+5V typ.
Current:	50 mA typ.


Mechanical

Size ^{*1} :	40*19.1*19.1mm 1.575*0.752*0.752in
Interface:	WR-28

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

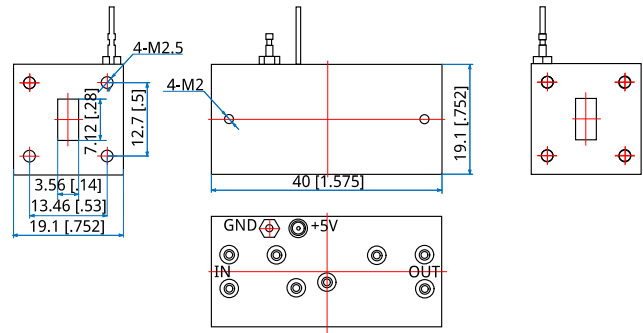

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

NLA-26500-40000-25-40

Customization is available upon request.

