

**NLA-60000-90000-26-43**  
60~90GHz, 26dB, 4.3dB

Features:  
\* Broad Band  
\* Low Noise

Applications:  
\* Wireless  
\* Receiver  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency:	60~90GHz
Small Singal Gain:	26dB min.
Noise Figure:	4.3dB max.
Input VSWR:	2 typ.
Output VSWR:	2 typ.
Voltage:	+7V DC (+6V min., +10V max.)
Current:	140mA typ.
Impedance:	50Ω
Input Power:	10dBm max.

**Mechanical**


Size*1:	35*30*22mm 1.378*1.181*0.866in
RF Interface:	WR-12
Flange:	UG-387/U
Power Supply Connectors:	Feed Through/Terminal Post

[1] Exclude connectors.

**Environmental**

Operating Temperature:	10~+40°C
Non-operating Temperature:	0~+50°C

**Outline Drawings**

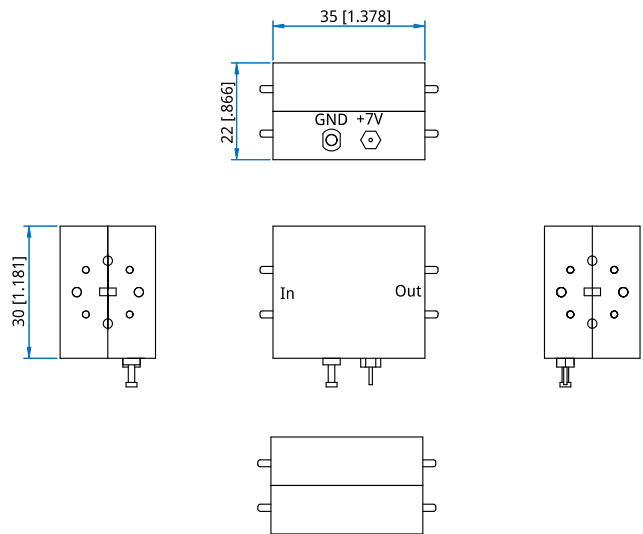

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**  
**NLA-60000-90000-26-43**

Customization is available upon request.