

NLA-700-1100-20-25
0.7~1.1GHz, 20dB, 2.5dB

Features:
* Broad Band
* Low Noise

Applications:
* Wireless
* Receiver
* Laboratory Test
* Radar

Electrical

Frequency:	0.7~1.1GHz
Gain:	20dB min.
Gain Flatness:	±1.0dB typ.
Output Power (P1dB):	+13dBm min.
Noise Figure:	2.5dB max.
Spurious:	-60dBc max.
VSWR:	1.5 max.
Voltage:	+12V DC
Current:	120mA typ.
Impedance:	50Ω
Input Power:	+10dBm max.

Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

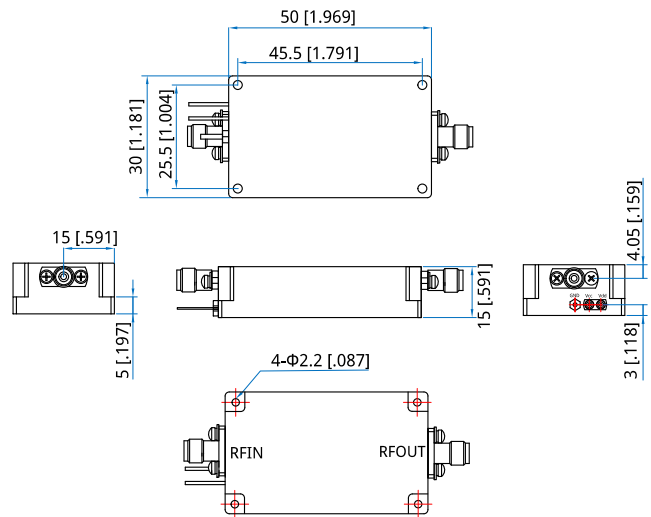

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order
NLA-700-1100-20-25

Customization is available upon request.

