

**NLA-8000-26500-15-35**  
8~26.5GHz, 15dB, 3.5dB

Features:  
\* Broad Band  
\* Low Noise

Applications:  
\* Wireless  
\* Receiver  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency:	8~26.5GHz
Gain:	15dB min.
Gain Flatness:	±1.5dB typ.
Output Power (P1dB):	+8dBm min.
Noise Figure:	3.5dB typ.
Spurious:	-60dBc max.
VSWR:	1.5 typ.
Voltage:	+5V DC
Current:	100mA typ.
Impedance:	50Ω
Input Power:	+10dBm max.

**Mechanical**


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-40~+85°C

**Outline Drawings**

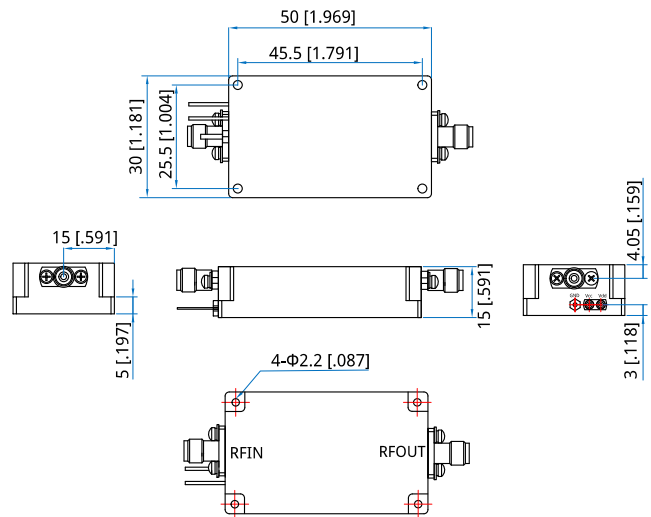

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NLA-8000-26500-15-35**

Customization is available upon request.

