

NPS1-500-18000-R

SPST, 0.5~18GHz, Reflective

Features:

- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~18GHz
Insertion Loss:	2.5dB max.
Isolation:	70dB min.
VSWR:	1.8 max.
Power:	23dBm max.
On/Off Delay:	40nS max.
Supply Voltage:	$\pm 5 \pm 0.5V$
Current:	0.05A max
Control:	TTL High - 1 TTL Low/NC - 0

Mechanical


Size ^{*1} :	24*18*10.2mm 0.945*0.709*0.402in
RF Connectors:	SMA Female
Material:	Aluminum
Mounting:	4- $\Phi 2.7$ mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

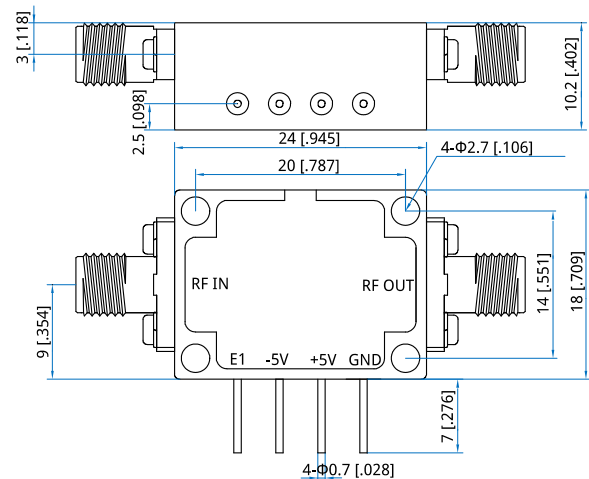

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]

Control True Table

C	Connection
1	Off
0	On

How To Order

NPS1-500-18000-R

Customization is available upon request.