

# NPS2-14-1000-A

SP2T, 0.014~1GHz, Absorptive

**Features:**

- \* Low Insertion Loss
- \* High Isolation

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	0.014~1GHz
Insertion Loss:	1.5dB max.
Isolation:	65dB min.
VSWR:	1.6 max.
Input Power:	37dBm max.
On/Off Delay:	3.5uS max.
Impedance:	50Ω
Voltage:	+12V DC
Current:	150mA

**Mechanical**


Size*1:	44*35*9.5mm 1.732*1.378*0.374in
Weight:	40g
Material:	Aluminum
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

**Outline Drawings**

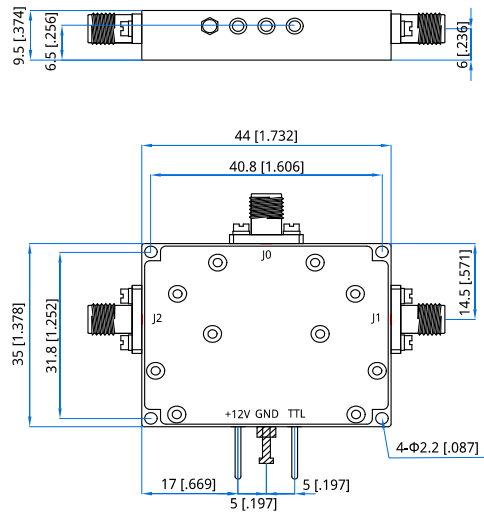

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**Control True Table**

Ctrl	Connection
0	J0 - J1 On, J0 - J2 Off
1	J0 - J2 On, J0 - J1 Off

**How To Order**

**NPS2-14-1000-A**

Customization is available upon request.