

NPS4-8000-40000-A

SP4T, 8~40GHz, Absorptive

- Features:

 - * Low Insertion Loss
 - * High Isolation
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test
 - * Radar

Electrical

Frequency:	8~40GHz
Insertion Loss:	6.5dB max.
Isolation:	60dB min.
On/Off Delay:	50nS max.
VSWR:	3 max.
Impedance:	50Ω
Input Power:	23 dBm max.

Mechanical

Size ^{*1} :	31.18*27*12mm 1.228*1.063*0.472in
RF Connectors:	2.92mm Female
Weight:	23g
Material:	Aluminum
Outer Conductor:	Gold Plating or Nickel plated
Mounting:	3-Φ2.2mm through-hole

[1] Exclude connectors.


Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Pin Numbering

C1	C2	C3	C4	Connection
0	1	1	1	J0-J1
1	0	1	1	J0-J2
1	1	0	1	J0-J3
1	1	1	0	J0-J4

Outline Drawings

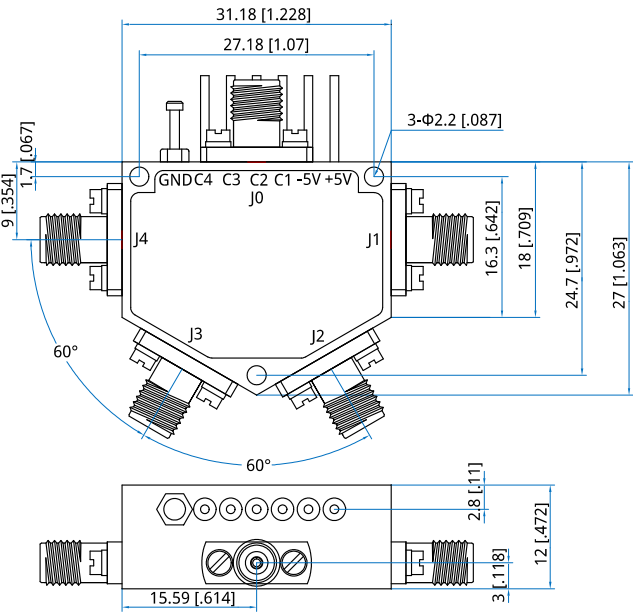

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NPS4-8000-40000-A

Customization is available upon request.