

NPSD-9000-18000-R

DPDT, 9~18GHz, Reflective

Features:

- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	9 ~ 18 GHz
Insertion Loss:	2.6dB max.
Isolation:	60dB min.
VSWR:	2 max.
Input Power:	23dBm max.
Voltage:	+5V, -12V
Current:	100mA, 100mA
On/Off Delay:	150nS max.
Control:	TTL High - 1 TTL Low/NC - 0

Mechanical


Size ^{*1} :	25.4*25.4*13.5mm 1*1*0.531in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Mounting:	2-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings

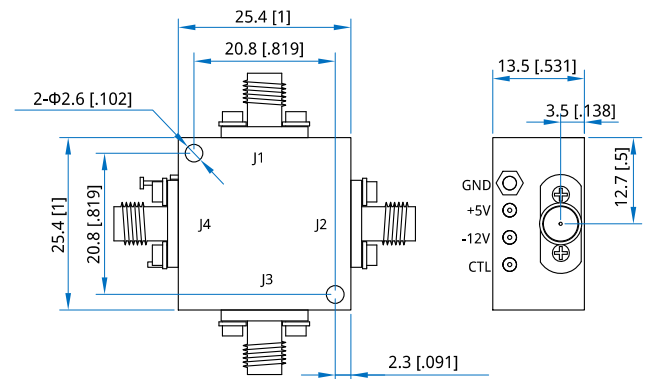

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Control True Table

C	Connection
0	J1 - J2, J3 - J4
1	J1 - J4, J2 - J3

How To Order

NPSD-9000-18000-R

Customization is available upon request.